

EZCT-2000TM

Current Transformer Test Set




Vanguard Instruments Co., Inc.
Ontario, California, USA



Vanguard Instruments Company

www.vanguard-instruments.com

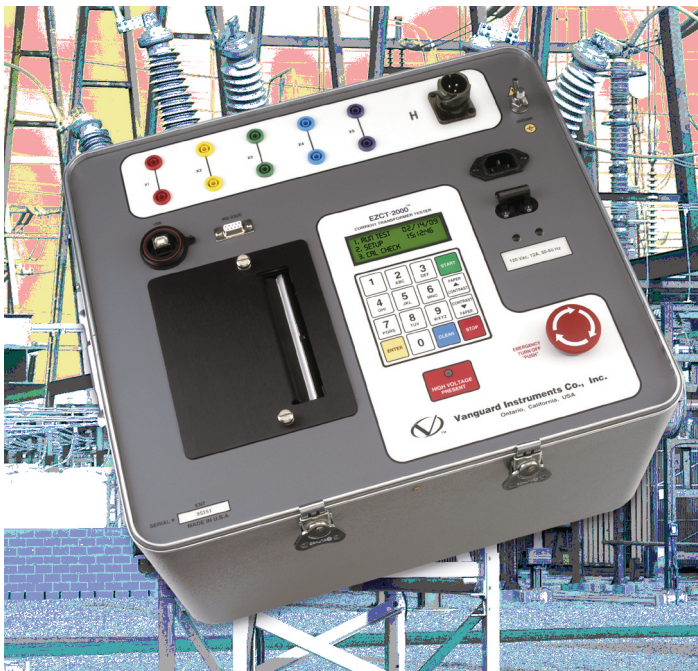

EZCT-2000™

The EZCT-2000 is Vanguard's second-generation microprocessor-based current transformer test set. The EZCT-2000 can perform the current transformer (CT) excitation test, measure the CT winding resistance and CT current-ratio automatically. All of the EZCT-2000's test leads can be connected to the CT output terminals (X1, X2, X3, X4 and X5), eliminating the need for lead switching during testing. Test voltage output is automatically raised and lowered by the EZCT-2000 without any operator intervention. With up to 2000 Vac excitation test voltage available, the EZCT-2000 can easily perform excitation tests on very large CT's.

Excitation Test

The CT excitation test is performed using the ANSI/IEEE C57.13.1, IEC 60044-1 test method. The test voltage range for the CT excitation test (50 Vac, 300 Vac, 500 Vac, 1200 Vac or 2000 Vac) can be selected, and then the test voltage is raised and lowered automatically by the EZCT-2000. The excitation test voltage and current data is collected and stored in the unit's internal memory. Any of the 10 possible combinations of X1 to X5 can be tested since all of the unit's test leads can be connected to all of the CT output terminals at the same time. Up to 10 excitation tests can be stored in one record. Once the test is completed, test results can be printed and excitation curves can be plotted on the built-in 4.5-inch wide thermal printer.

CT Ratio and Polarity Test

The EZCT-2000 determines the CT current-ratio using the ANSI/IEEE C57.12.90 measurement method. A test voltage is applied on any two terminals of the CT (X1 to X5), and the induced voltage is measured through the CT's H1 and H2 terminals. The CT current-ratio is displayed on the screen and stored in memory. The current-ratio measuring range is from 0.8 to 5,000. The CT winding polarity is displayed as a "+" sign (in-phase) or a "-" sign (out-of-phase) and is annotated with the phase angle in degrees.

CT Winding Resistance Test

The EZCT-2000 can also measure the DC resistance of the CT winding under test. The DC winding resistance measuring range is from 100 micro-ohms to 10 ohms.

Simplify

User Interface and Display

The EZCT-2000 features a back-lit LCD screen (4 lines by 20 characters) that is viewable in both bright sunlight and low-light levels. A rugged, alpha-numeric, membrane keypad is used to control the unit.

Thermal Printer

A built-in 4.5-inch wide thermal printer can print the current transformer test report and plot the excitation curves.

Test Record Header Information

Test record header information can include the company name, substation name, circuit ID, manufacturer, CT serial number, operator's name and test record comments. In addition to the test record header, a 20-character test description for each test in the record (10 tests per record) can also be entered.

Internal Test Record Storage Capacity

The EZCT-2000 can store up to 140 test records in Flash EEPROM. Each test record may contain up to 10 excitation curves, current-ratio readings, polarity and DC resistance readings. Test records can be recalled and printed on the built-in thermal printer.


Internal Test Plan Storage Capacity

The EZCT-2000 can store up to 128 CT test plans in Flash EEPROM. A test plan defines the excitation test voltage and current range selection, CT nameplate ratio, and CT winding terminals (X1 to X5) for each of the tests. Up to 10 test definitions can be stored per test plan. The use of a test plan greatly simplifies the CT testing process; the EZCT-2000 is connected to the CT terminals and a test plan is simply selected and run. Test plans can be created on the EZCT-2000 itself or created on a PC and downloaded to the EZCT-2000 via the built-in RS-232C or USB interfaces.

Computer Interface

The EZCT-2000 can be used as a stand-alone unit or can be computer-controlled via the built-in RS-232C or USB interfaces.



A Windows® XP/Vista-based Current Transformer Analysis software application is provided with each EZCT-2000. This software can be used to retrieve test records from the EZCT-2000, create test plans, download test plans to the EZCT-2000, and can also be used to run CT tests from the PC. Tabulated test records can be exported in Microsoft® Excel® format.

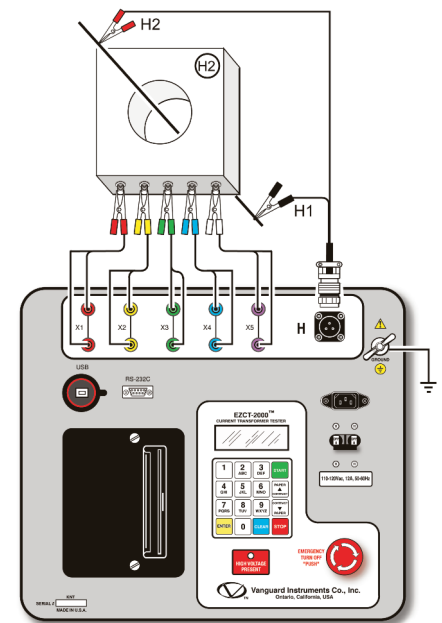

EZCT-2000™ Connections

Current-Transformer Test Set

the Tedious Procedure of Current-Transformer Testing with the EZCT-2000™ Current Transformer Test Set

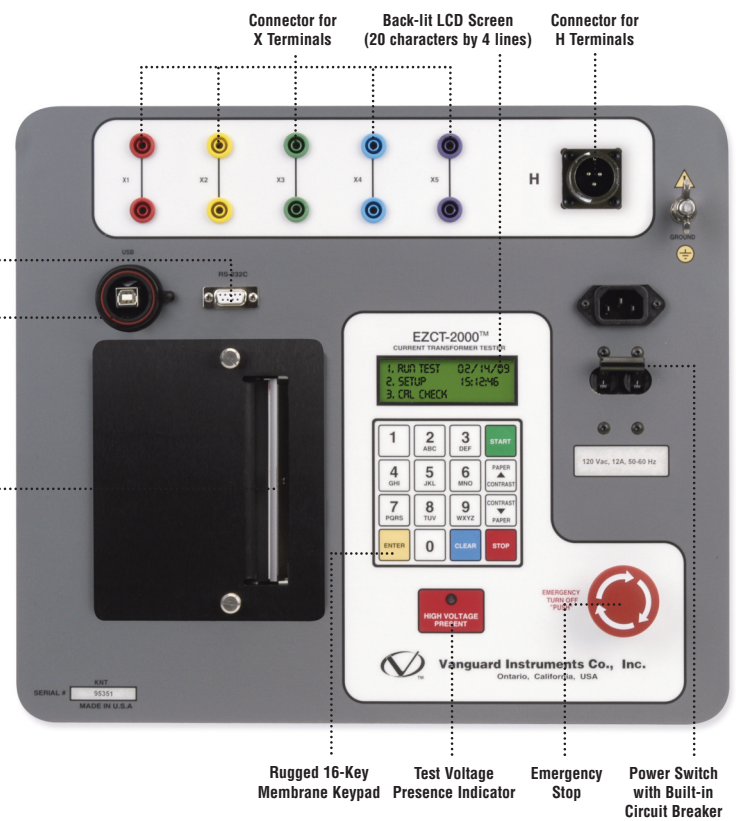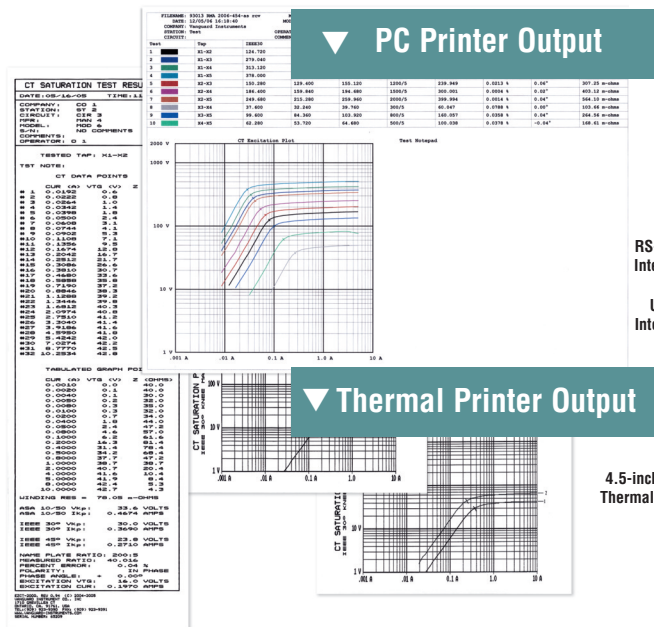

Ordering Information EZCT-2000™ Current Transformer Test Set

EZCT-2000™, Cable, Software
EZCT-2000™ Shipping Case
4.5-inch Printer Paper

Part No: EZCT-2000
Part No: EZCT-2000 Shipping Case
Part No: Paper TP4

SPECIFICATIONS

TYPE	Portable current-transformer test set
PHYSICAL SPECIFICATIONS	16.8"W x 12.6"H x 14"D (42.7 cm x 32.0 cm x 35.6 cm); Weight: 60 lbs (27.2 Kg)
INPUT POWER	100 – 120 Vac or 200 – 240 Vac (factory pre-set), 50/60 Hz
MEASUREMENT METHOD	ANSI/IEEE C57.12.90, IEC 60044-1 and ANSI/IEEE C57.13.1
OUTPUT TEST VOLTAGES	0 – 50 Vac @ 10A max, 0 – 300 Vac @ 10A max, 0 – 500 Vac @ 5A max 0 – 1200 Vac @ 2A max, 0 – 2000 Vac @ 1.2 A max
VOLTAGE READING RANGE	0 – 2,200 Vac; Accuracy: ±1.0% of reading, ±1 volt
CURRENT READING RANGE	0 – 10A; Accuracy: ±1.0% of reading, ±0.02A
CURRENT RATIO RANGE	0.8 – 999: 0.1%, 1000 – 1999: 0.3%, 2000 – 5000: 1%
PHASE ANGLE MEASUREMENT	0 – 360 degrees, Accuracy: ±1.0 degree
RESISTANCE READING RANGE	100 micro-ohms – 10 ohms, Accuracy: 2% of reading, ±1 count, ±10 ohms
DISPLAY	Back-lit LCD Screen (20 characters by 4 lines); viewable in bright sunlight and low-light levels
PRINTER	Built-in 4.5-inch wide thermal printer
COMPUTER INTERFACES	One RS-232C port (115k baud), One USB port
PC SOFTWARE	Windows®XP/Vista-based CT Analysis software is included with purchase price
INTERNAL TEST RECORD STORAGE	Stores 140 test records. Each test record may contain up to 10 sets of excitation, resistance and ratio data
INTERNAL TEST PLAN STORAGE	Stores 128 test plans. Each test plan can store 10 excitation test voltage and current settings
SAFETY	Designed to meet UL 61010A-1 and CAN/CSA C22.2 No. 1010.1-92 standards
ENVIRONMENT	Operating: -10° to 50° C (15°F to +122° F); Storage: -30° C to 70° C (-22°F to +158° F)
CABLES	Five 20-foot X cable sets, One 35-foot H cable set, power cord, One cable-carrying duffel bag
WARRANTY	One year on parts and labor

Note: The above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.

Vanguard Instruments Company
Reliability Through Instrumentation

Vanguard Instruments Company, Inc.

Vanguard Instruments Co., (VIC), was founded in 1991. Currently, our 28,000 square-foot facility houses Administration, Design & Engineering, and Manufacturing operations. From its inception, VIC's vision was, and is to develop and manufacture innovative test equipment for use in testing substation EHV circuit breakers and other electrical apparatus.

The first VIC product was a computerized circuit-breaker analyzer, which was a resounding success. It became the forerunner of an entire series of circuit-breaker test equipment. Since its beginning, VIC's product line has expanded to include microcomputer-based, precision micro-ohmmeters, single and three-phase transformer winding turns-ratio testers, winding-resistance meters, transformer tap-changing controllers, megaohm resistance meters, and a variety of other electrical utility maintenance support products.

VIC's performance-oriented products are well suited for the utility industry. They are rugged, reliable, accurate, user friendly, and most are computer controlled. Computer control, with innovative programming, provides many automated testing functions. VIC's instruments eliminate tedious and time-consuming operations, while providing fast, complex, test-result calculations. Errors are reduced and the need to memorize long sequences of procedural steps is eliminated. Every VIC instrument is competitively priced and is covered by a liberal warranty.



Vanguard Instruments Company, Inc.

1520 S. Hellman Ave. • Ontario, California 91761 USA • P 909-923-9390 • F 909-923-9391
www.vanguard-instruments.com