



### **Universal Power Supply** Serie

The Vanguard Universal Power Supply S2 (UPS S2) is designed to meet a utility company's substation needs for an independent AC/DC power source. The UPS S2's AC and DC voltage sources can each supply up to 10 amperes.

The variable DC power supply  $(10-300~{\rm Vdc})$  is ideal for use as a substitute primary power source when substation batteries are not available. The UPS S2 is best suited for operating circuit-breakers, powering substation relays, or for un-regulated charging of substation batteries. The AC power supply is a variable isolated power source  $(10-240~{\rm Vac})$  that can be used to power other equipment in the substation.

# Vanguard's Series

#### **UPS-S2 FEATURES**

- Isolated variable 10 300 Vdc source
- Isolated variable 10 240 Vac source
- 10 ampere continuous current

#### Ordering Information – Universal Power Supply S2

UPS-S2 Shipping Case UPS-S2 Test Leads


Part No: UPS-S2
Part No: UPS-S2 Case
Part No: UPS-S2 Test Leads

The Universal Power Supply S2 delivers several important features:


- All output power sources are isolated from the primary power input by an isolation transformer.
- Voltage outputs are continuously variable (auto-transformer) via a front panel control knob.
- The primary power input is selectable (120Vac or 240Vac).
- All voltage outputs are capable of supplying a continuous 10 ampere load.

For ease of operation, the power output path is clearly outlined on the control panel. This provides an intuitive visual guide for making the appropriate selections for a particular operating configuration.

The Universal Power Supply S2 is housed in a heavy-duty, impact-resistant plastic enclosure and is furnished with a power cord, grounding cable, and a pair of test leads with alligator clips.

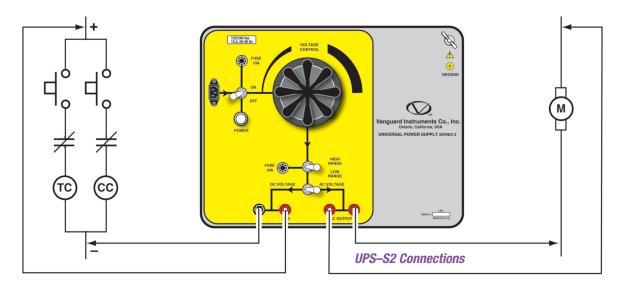

## an Ideal Substitute Power Source When Substation Batteries are Not Available

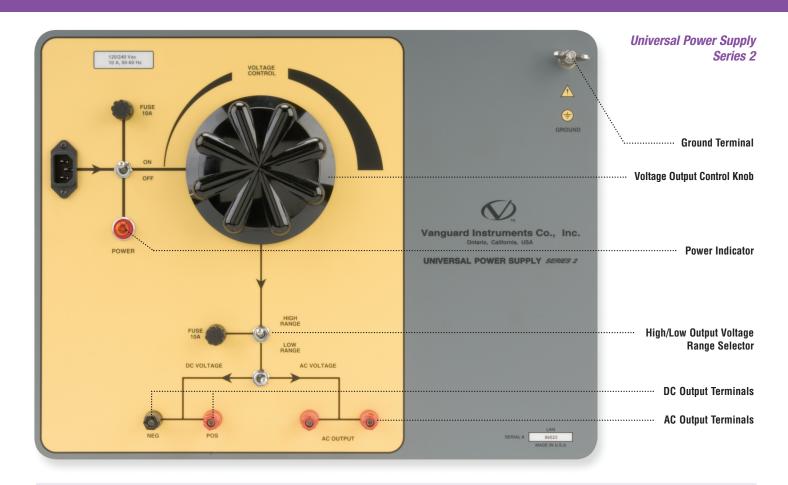

### **SPECIFICATIONS**

**TYPE** Potable AC/DC power supply

PHYSICAL SPECIFICATIONS 21"W x 17"H x 9"D (53 cm x 43 cm x 24 cm); Weight: 55 lbs (25 Kg)

**INPUT POWER** 100 – 120 Vac or 200 – 240 Vac (factory pre-set), 50/60 Hz

**DC OUTPUT VOLTAGE** 10 − 300 Vdc @ 10 amperes **AC OUTPUT VOLTAGE** 10 − 240 Vac @ 10 amperes

SAFETY Designed to meet UL 61010A-1 and CAN/CSA C22.2 No. 1010.1-92 standards

**ENVIRONMENT** Operating: -10° to 50° C (15°F to +122° F); Storage: -30° C to 70° C (-22°F to +158° F)

**CABLES** Power cord, ground cable, 10-foot test leads

**OPTIONS** Transportation Case

**WARRANTY** One year on parts and labor

Note: The above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.



